




2-Leg Bridle

HH-202-TTS

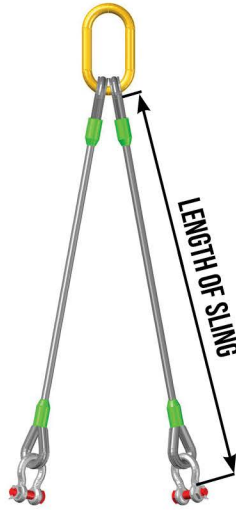

WIRE ROPE SLINGS

PRODUCTS

Wire Rope Diameter (inches)	EIPS Capacities In Tons Angle With Horizontal			Recommended Master Link			Recomm. Shackle Size (Inches)	Recomm. Eye Hooks	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia.	Width	Length			
1/4"	1.1	0.91	0.65	1/2"	2.5"	5"	3/8"	3/4 ton	1'3"
3/8"	2.5	2.0	1.4	5/8"	3"	6"	1/2"	1.5 ton	1'8"
1/2"	4.4	3.6	2.5	3/4"	2.75"	5.5"	5/8"	3 ton	2'0"
5/8"	6.8	5.5	3.9	1"	3.5"	7"	3/4"	5 ton	2'4"
3/4"	9.7	7.9	5.6	1"	3.5"	7"	7/8"	7 ton	2'9"
7/8"	13	11	7.6	1-1/4"	4.3"	8.75"	1"	7.5 ton	3'3"
1"	17	14	9.8	1-1/2"	5.25"	11.5"	1-1/8"	10 ton	3'6"
1-1/8"	21	17	12	1-1/2"	5.25"	11.5"	1-1/4"	15 ton	4'0"
1-1/4"	26	21	15	1-3/4"	6"	12"	1-3/8"	15 ton	4'6"
1-3/8"	31	25	18	2"	7"	14"	1-1/2"	20 ton	5'0"
1-1/2"	37	30	21	2"	7"	14"	1-3/4"	22 ton	5'6"
1-3/4"	49	40	28	2-1/4"	8"	16"	2"	30 ton	6'6"
2"	63	52	37	2-1/2"	8"	16"	2-1/2"	37 ton	8'0"
2-1/4"	77	63	44	2-3/4"	9"	16"	2-1/2"	-	8'9"

All master links are sized to accommodate heavy-duty thimbles.
If thimbles are not required, a smaller master link may be appropriate.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.